



Installation View

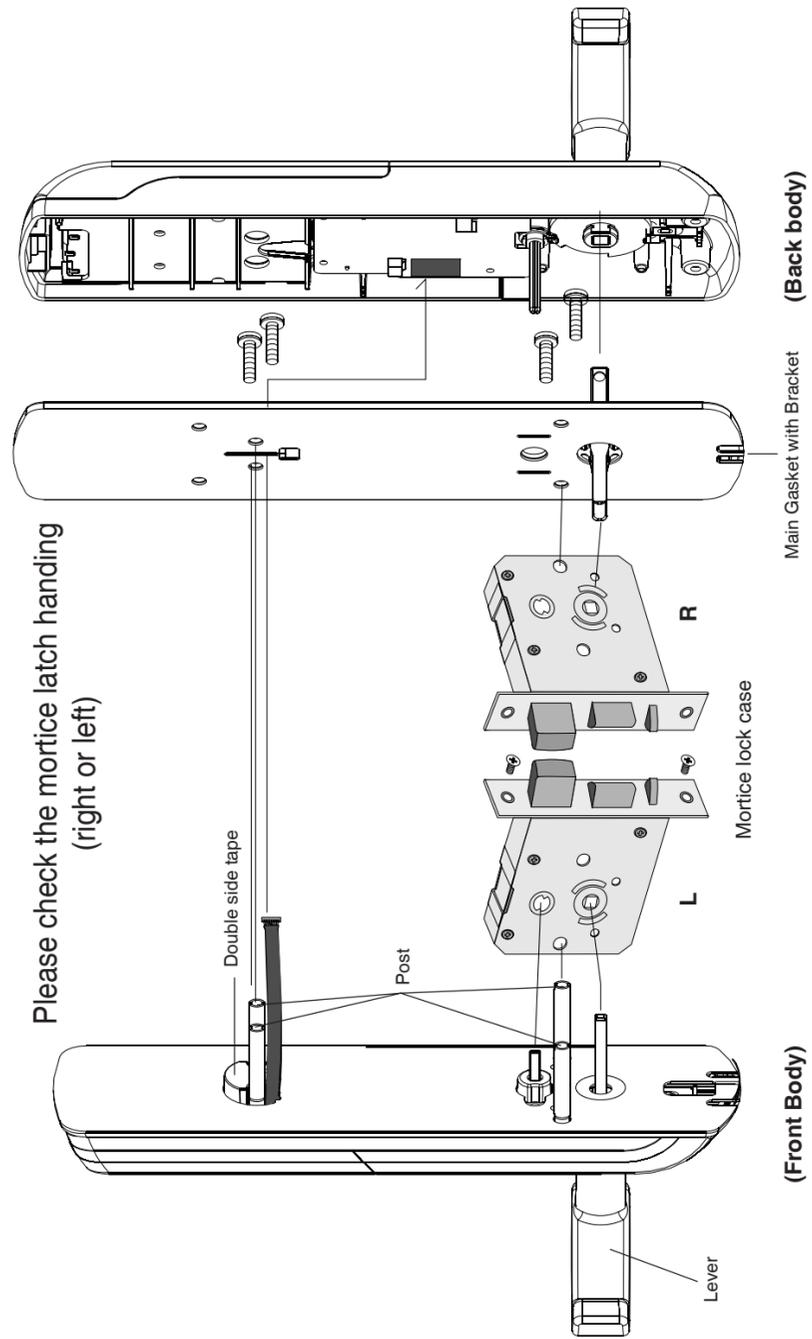

Yale The world's favourite lock


YDM2107, YDM3107
Installation Template

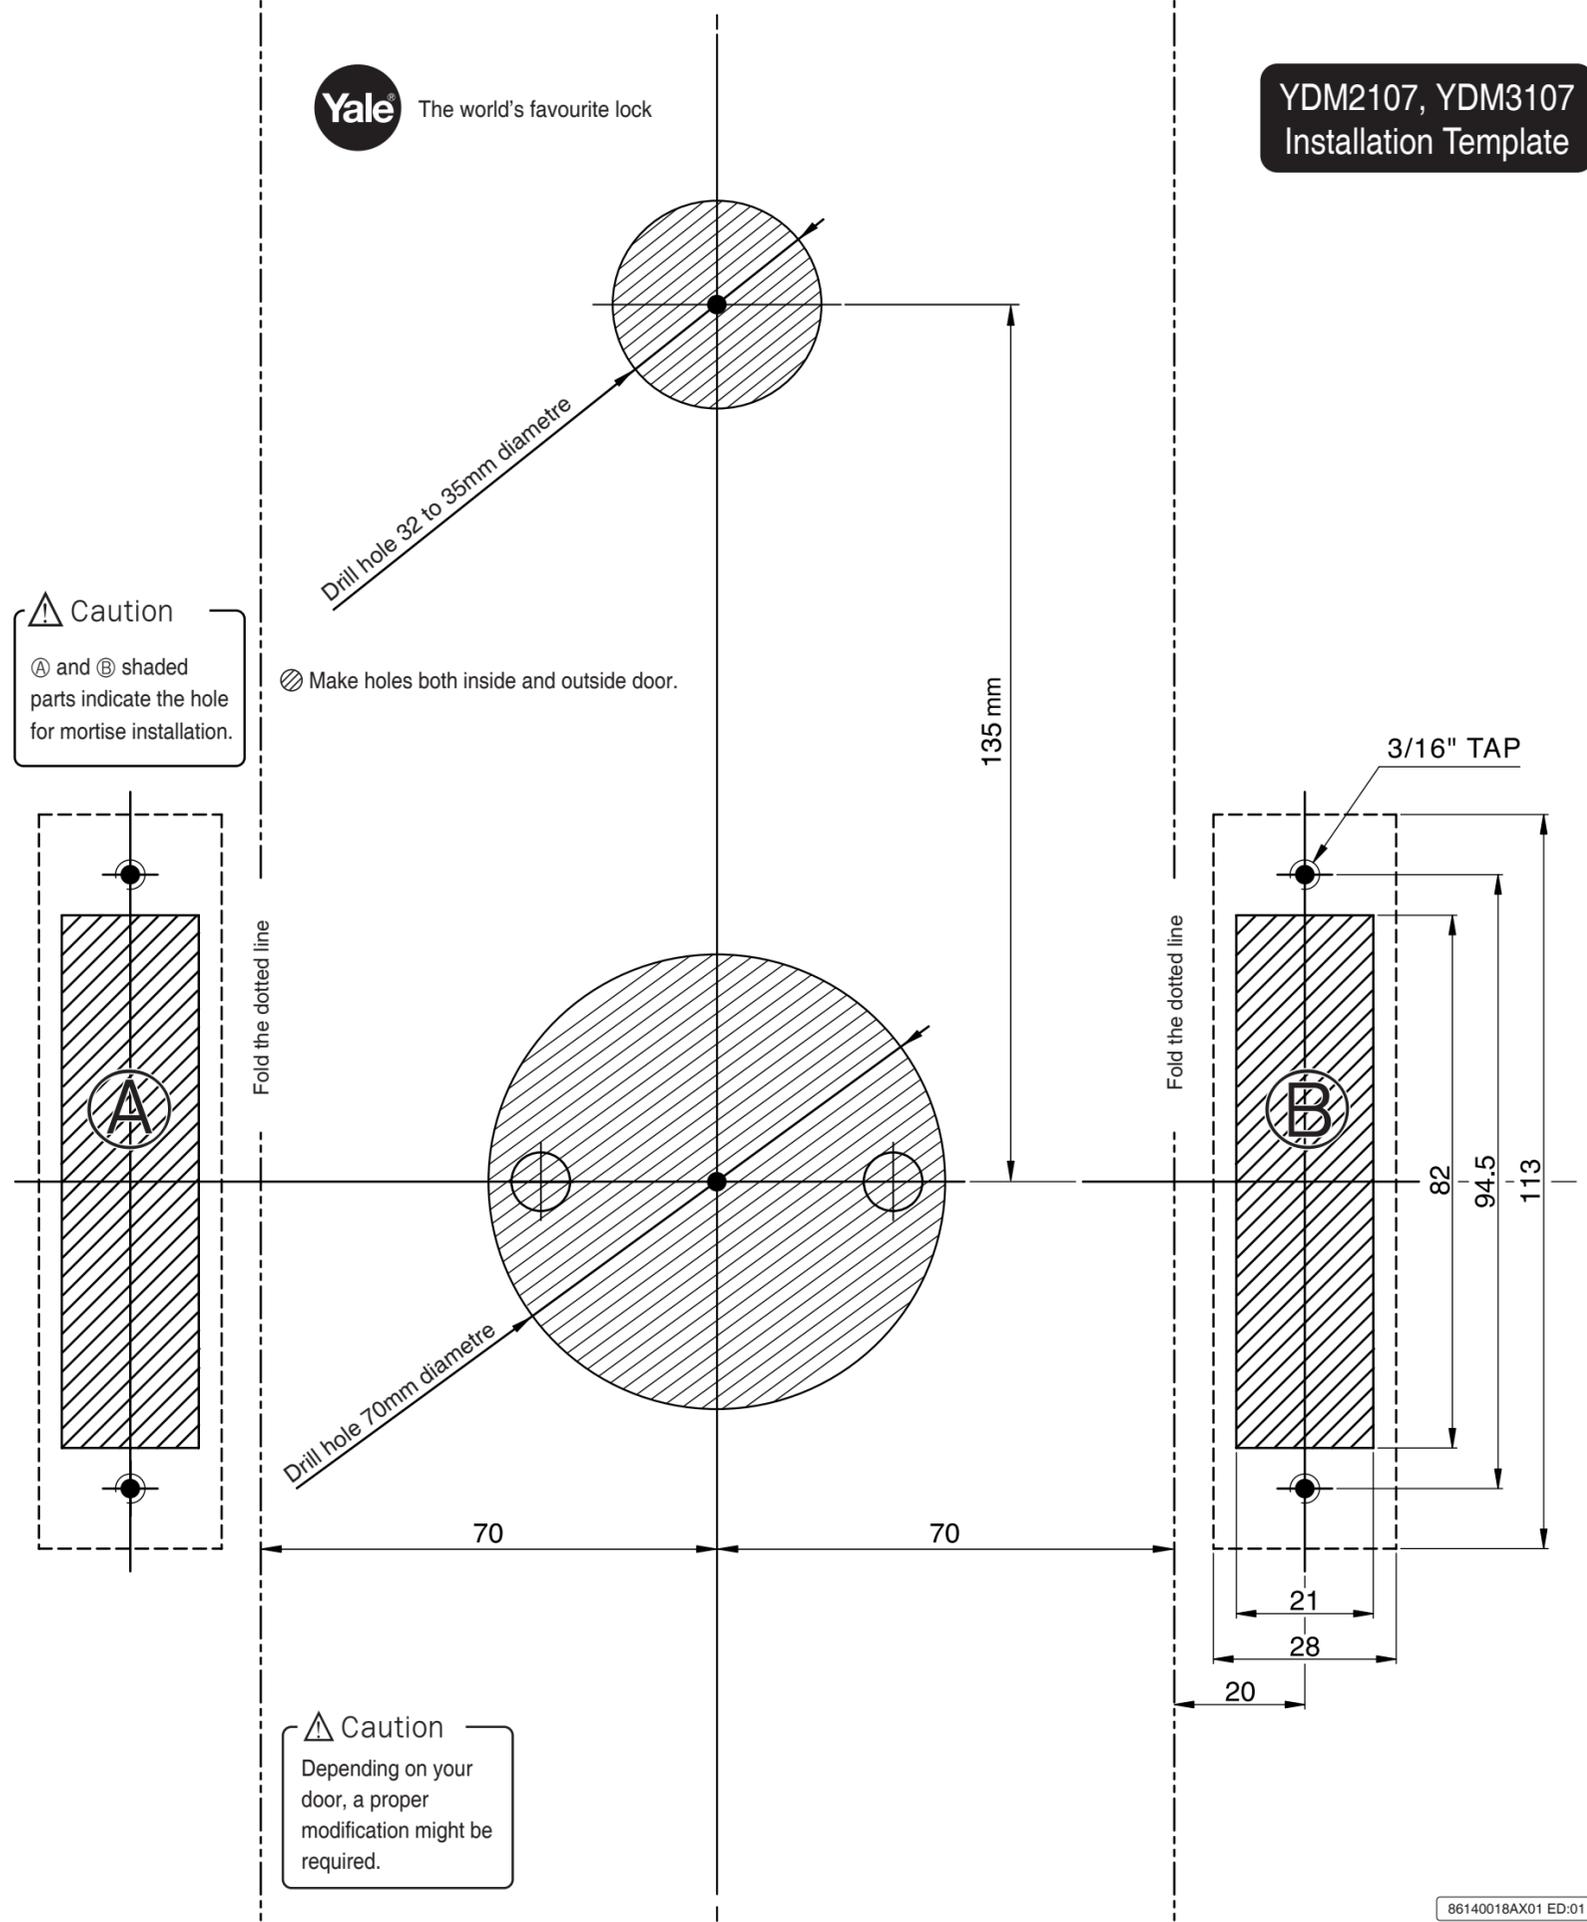

YDM2107, YDM3107 Installation Instruction

1. According to the door type, fold the installation template .

2. Attach the installation template on the outer side of the door, mark the centre position for each hole.

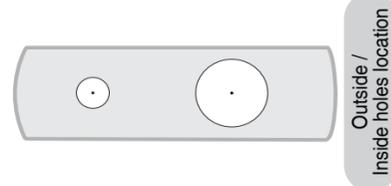

3. Drill hole as marked from template.


4. Determine whether the door should use the left handed (LH) or the right handed (RH) mortise.

Note :

- If the hinges are positioned on the right, select the right handed mortise, and vice versa.
- If the door opens outward, select opposite.

5. Tighten screws after mortise installation.


- Check the latch direction is adjusted to suit the handing.

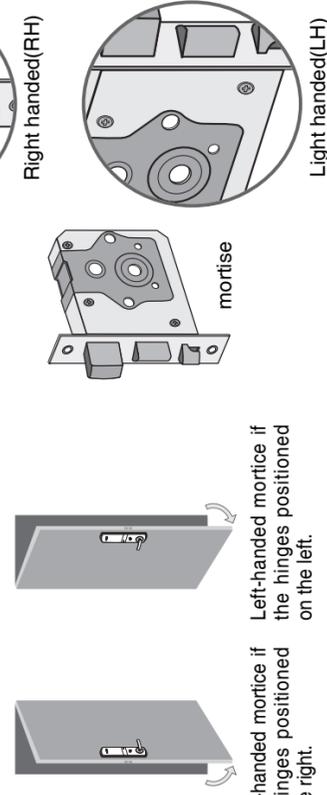


Right-handed mortise if the hinges positioned on the right.

Left-handed mortise if the hinges positioned on the left.


6. Make sure the dead bolt goes into the mortise when you install. Otherwise inside lever will not work properly.



7. Turn the internal & external lever to 90-100 degrees right or left depend on door handing until it locks into position.



8. Push down the lever stopper in back side of the front & back body when you need to change the lever position.

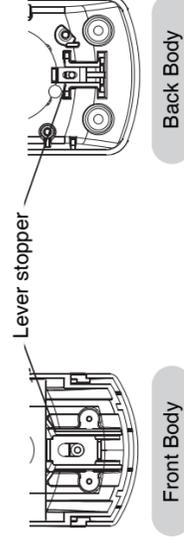


9. Put the front body on the door panel with the posts passing through the hole.

10. Fix the Front body together with the main gasket(with Bracket).


11. Connect the Front PCB wire to the Main PCB properly and fix the Back body with 4 screws.

12. Tighten the internal lever with socket screw and hexagon key.




Caution

1. Right handed door striker installation -RH / UP

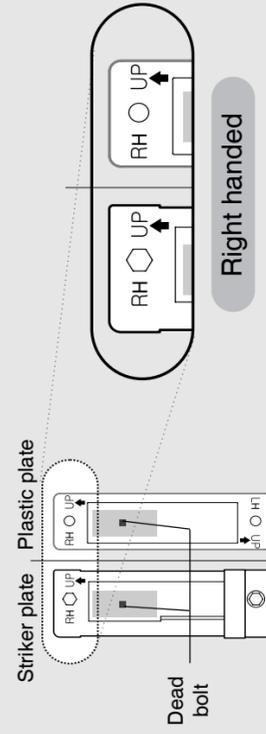

2. Left handed door striker installation -LH / UP

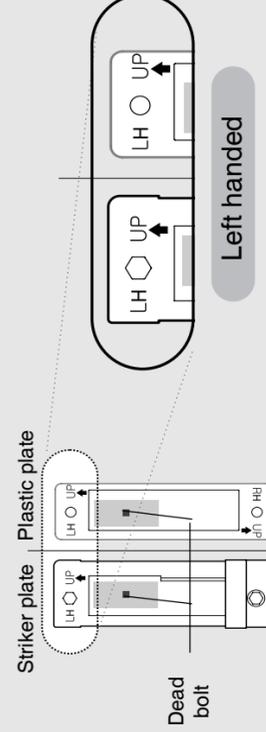

3. Check the automatic/manual mode

